

FEATURES

Supplementary

- Profiles
- QR Code
- Roaming
- Covert Mode
- Radio Check
- Remote Monitor
- Alert Call

Voice Service

- Private Call
- Group Call
- All Call
- PSTN/PABX Call
- Broadcast Call
- Emergency Call
- Call Priority

Analogue Mode

- 2-Tone signalling
- HDC1200

APPLICATIONS



Transportation



Manufacturing




Business



Public Safety



Security

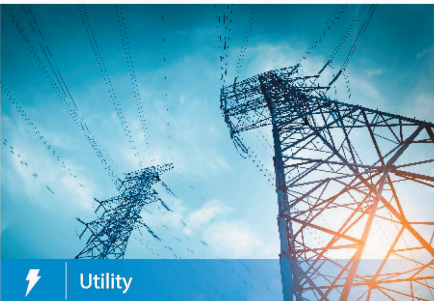

Utility

Operating Modes

- Digital Conventional
- Analogue Conventional
- Digital Trunking

Data Services

- Text Message
- Status Message
- Quick Text Message

Connection

- BT Audio
- BT Data
- High Efficiency GNSS
- -GPS
- -GLONASS
- Wide Range of Accessories
- Open API

Safety

- Emergency
- Man Down
- Lone Worker
- Authentication
- Air Interface Encryption
- End-to-End Encryption
- Scrambler
- Disable/Enable
- Micro SD Card

SPECIFICATIONS

| General                                         |                                                                                          |
|-------------------------------------------------|------------------------------------------------------------------------------------------|
| Frequency Range                                 | UHF: 350~470MHz<br>VHF: 136~174MHz                                                       |
| Channel Capacity                                | 1024                                                                                     |
| Zone Capacity                                   | 64                                                                                       |
| Channels Per Zone                               | 256                                                                                      |
| Channel Spacing                                 | 12.5kHz/20kHz/25kHz                                                                      |
| Operating Voltage                               | 7.7V (rated)                                                                             |
| Battery                                         | 2400 mAh Li-polymer                                                                      |
| Battery Life (5/5/90 Duty Cycle, High TX Power) | 24h (GNSS disabled)<br>20h (GNSS enabled)                                                |
| Frequency Stability                             | ±0.5ppm                                                                                  |
| Antenna Impedance                               | 50Ω                                                                                      |
| Dimensions (H x W x D)                          | 132 x 55 x 29.5mm                                                                        |
| Weight (with antenna & battery)                 | 310g                                                                                     |
| Display                                         | LCD, 320x240 pixel, 262000 colors, 2.4 inch, 10 rows                                     |
| BT                                              | BT 5.0 BLE+EDR                                                                           |
| Receiver                                        |                                                                                          |
| Sensitivity                                     | Analogue: 0.18µV (12dB SINAD);<br>0.16µV (Typical) (12dB SINAD)<br>Digital: 0.18µV/BER5% |
| Adjacent Channel Selectivity                    | TIA-603: 60dB@12.5kHz / 70dB@20/25kHz<br>ETSI: 60dB@12.5kHz / 70dB@20/25kHz              |
| Intermodulation                                 | TIA-603: 70dB@12.5/20/25kHz<br>ETSI: 65dB@12.5/20/25kHz                                  |
| Spurious Response Rejection                     | TIA-603: 70dB@12.5/20/25kHz<br>ETSI: 70dB@12.5/20/25kHz                                  |
| Blocking                                        | TIA-603: 80dB ETSI: 84dB                                                                 |
| Hum and Noise                                   | 40dB@12.5kHz; 43dB@20kHz; 45dB@25kHz                                                     |
| Rated Audio Power Output                        | 0.5W                                                                                     |
| Rated Audio Distortion                          | ≤3%                                                                                      |
| Audio Response                                  | +1 ~ -3dB                                                                                |
| Conducted Spurious Emission                     | <-57dBm                                                                                  |

| Transmitter                                                                         |                                                               |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------|
| RF Power Output                                                                     | UHF: 1W/4W VHF: 1W/5W                                         |
| FM Modulation                                                                       | 11K0F3E@12.5kHz<br>14K0F3E@20kHz<br>16K0F3E@25kHz             |
| 4FSK Digital Modulation                                                             | 12.5kHz Data Only: 7K60FXD<br>12.5kHz Data and Voice: 7K60FXW |
| Conducted/Radiated Emission                                                         | -36dBm < 1GHz; -30dBm > 1GHz                                  |
| Modulation Limiting                                                                 | ± 2.5kHz@12.5kHz; ± 4.0kHz@20kHz; ± 5.0kHz@25kHz              |
| FM Hum&Noise                                                                        | 40dB@12.5kHz; 43dB@20kHz; 45dB@25kHz                          |
| Adjacent Channel Power                                                              | 60dB@12.5kHz; 70dB@20/25kHz                                   |
| Audio Response                                                                      | +1 ~ -3dB                                                     |
| Audio Distortion                                                                    | ≤3%                                                           |
| Digital Vocoder Type                                                                | AMBE+2™                                                       |
| Digital Protocol                                                                    | ETSI-TS102 361-1,-2,-3,-4                                     |
| Environmental                                                                       |                                                               |
| Operating Temperature                                                               | -30°C ~ +60°C                                                 |
| Storage Temperature                                                                 | -40°C ~ +85°C                                                 |
| ESD                                                                                 | IEC 61000-4-2 (Level 4)<br>±8kV (contact);<br>±15kV (air)     |
| Dust and Water Protection                                                           | IEC60529- IP68                                                |
| Humidity                                                                            | MIL-STD-810 G                                                 |
| Shock and Vibration                                                                 | MIL-STD-810 G                                                 |
| Location Services                                                                   |                                                               |
| Accuracy specs are for long-term tracking (5 satellites visible at nominal -130dBm) |                                                               |
| GNSS                                                                                | GPS, GPS+GLONASS, GPS+BDS                                     |
| TTFF (Time To First Fix) Cold Start                                                 | <1 min (Typical)                                              |
| TTFF (Time To First Fix) Hot Start                                                  | <10 sec (Typical)                                             |
| Horizontal Accuracy                                                                 | <5m (probable at -130dBm)                                     |
| *Radio only - Battery -20°C                                                         |                                                               |

ACCESSORIES

Standard



Charger



Adapter (12V/1A)



Li-polymer  
2400mAh battery



Antenna



Belt Clip



Strap

Optional



BT Wireless earpiece



Programming Cable  
(USB Port)



BT wireless ring PTT



BT Wireless remote  
speaker microphone



Wired Earpiece



Hytera Communications Europe

939 Yeovil Road, Slough, Berkshire, SL1 4NH

info@hytera-europe.com | www.hytera-europe.com



www.facebook.com/  
HyteraEurope



www.linkedin.com/company/  
hytera-communications-uk



www.instagram.com/  
Hytera.Europe



Subscribe on YouTube

Hytera reserves the right to modify the product design and the specifications. In case of a printing error, Hytera does not accept any liability. All specifications are subject to change without notice.

Eemits Communications  
Brignell Road  
Middlesbrough  
TS2 1PS  
0800 328 0100



Professional DMR portable radio  
HP785

NEXT GENERATION DIGITAL RADIO



# NEW TECHNOLOGY, NEW EXPERIENCE, NEW FUTURE

As the leading supplier, Hytera has huge experience in R&D and manufacturing of professional digital radios. Having analyzed and extracted users' need, we perceive that it is not enough to improve the status: the radio needs to be more future ready.

Taking inspiration from the feedback received from our users, we are continuously envisioning and exploring better communication within an ecosystem of new standards, new technologies, new products and new applications across the innovation chain. The HP785 is our brand new professional digital radio, and represents the future on style and functions that refreshes the standards in digital radios, providing more efficient and more reliable communication with loud and clear audio, powerful battery, remarkable portability and ruggedness for ease of use across multiple environments and industries.

## HIGHLIGHTS



### THINNER AND LIGHTER

An optimized mechanical design and a compact lithium polymer battery are discreetly made to fit into the HP785's design, making the radio only 29.5mm in thicknesses and 310g in weight. This easy to carry and minimalist design benefits officers by allowing them to keep their focus on the critical mission at hand.



### LONGER BATTERY LIFE

HP785 optimizes product design and technologies to reduce power consumption, meanwhile the latest in proven lithium polymer technology is used in the standard battery which is lighter and smaller than ever before.

The new technology achieves a shift life of 26 hours on high transmit power at duty cycle 5/5/90 so ensures a full day of delivering key information and calls.



### LOUDER AND CLEARER AUDIO

HP785 equips an optimised powerful loudspeaker that can help users to hear clear sounds even in a noisy environment. Water-porting technology is also used to drain out any water that gets into the speaker cavity, ensuring the audio clarity is maintained in case of water.

AI-based noise cancellation technology can decrease 30dB background noise and howling. No matter what noise environment the calling party is in, it ensures that the called party hears a clear sound.



### MORE INTUITIVE AND EFFICIENT

HP785 brings a large screen and a brand new intuitive UI to make the operation more efficient. The 2.4-inch colour screen can display more information (i.e. 6 contacts) per page. Its Quick Access Menu allows users to set the radio faster. Messages are listed in conversation for quick reading and review. The Interface Switcher is added to the option of programmable buttons, allowing quick switch between up to four frequently accessed interfaces.



### ENHANCED COVERAGE

The HP785 extends the operational range and improves the talk range through high receiver sensitivity and high transmit power, stretching communications into areas where it simply was not possible before. This enhanced coverage improves the user safety and reduces network cost as much as possible.



### HIGHER LEVEL OF RUGGEDNESS

HP785 is designed as per the MIL-STD-810 G. It is IP68 rated, impervious to water jets and submersible to a depth of 2 meters for 4 hours, and also resilient to 2-meter drops onto concrete. No matter where the mission drives the user, the HP785 is the partner to count on, because it can stand up to the toughest environment.



### FLEXIBLE WIRELESS CONNECTION

HP785 supports built-in BT 5.0 for wireless connections. The advantage of BT 5.0 is low power consumption, rapid transmission and supports multiple devices and more rich data applications such as BT earpiece, BT Patrol, BT positioning.

